




CRYL-A-STAIN®

The samples shown are only close approximations and should not be used for specification purposes. Contact Dur-A-Flex® to obtain actual samples for best color selection.

Standard Colors

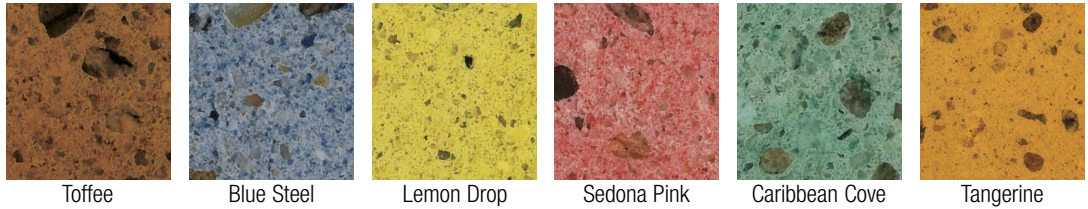

The picture shown above is an actual floor demo installed over cured concrete showing various color combinations from layering the seven standard colors.

Physical Properties

Properties	Cryl-A-Stain
VOC Content	<100 g/L
% Solids	100% reactive
Tensile Strength	3,550 psi (24.5 N/mm ²)
Tensile Modulus	40,000 psi (2,760 N/mm ²)
Pot Life @ 68° F (20° C)	10-20 minutes
Cure Rate @ 68° F (20° C)	25-45 minutes
Recoat Time	45-60 minutes
LEED® Credit Eligible	Yes

